


Wi-Fi 720P HD Day & Night Plug & Play Camera Quick Guide

1. Package Content

Camera / AC Power Adapter /
Mounting Bracket and Screws / Guide Guide

2. Name of Each Part

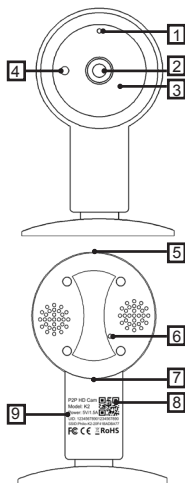

1. Power LED Indicator
2. Lens
3. IR LED (night vision function)
4. Network LED Indicator
5. Micro SD Card
6. Reset Button
7. Micro USB Socket
8. Camera UID
9. Camera SSID

3. Network Requirements

- An ADSL modem with internet connection.
- A broadband router with Wi-Fi capability. Please make sure DHCP on router is enabled.
- Android or iOS Smart Phone; 3G/Wifi network connection preferred.

4. Installation


Step 1. Install "P2P IPCamera" to your mobile device.



P2P IPCamera




Step 2. Connect micro USB to IP camera and plug to socket to power the IP camera.

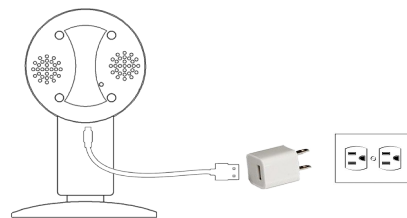


Step 3. When camera is ready to be used, there will be a sound coming out from camera.

Step 4. On your wireless connection, find SSID of Camera: "Philio-K2-xxxx". Join into the network.



Search for SSID

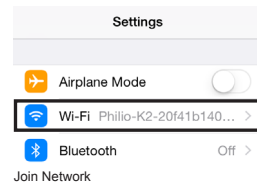


Join Network


Step 5. Open APP “P2P IP Camera” on your smartphone.

Step 6. Add the IP Camera to APP, you can either


- Scan the QR Code.
- Wait for APP to find the camera.
- Enter UID manually.

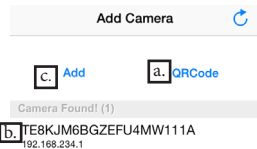

Step 7. Enter Password (Default 888888) then press Save.




Step 8. Once the status of camera is online, you can click and watch the live video right away.




5. Set to Wireless Mode

Step 1. Click on the “i” for the settings.



Step 2. Select Advance Settings. Select Wi-Fi Setting. Select the preferred Wi-Fi and enter password then press Join.

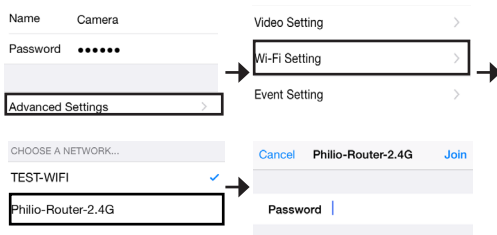

Step 3. It will load for a minute. When successful, you will hear the sound coming from camera (a different from the one when initially started).




6. Add IP Camera into the Gateway

Step 1. Open APP “Z-wave Home HD” on mobile device.




Step 2. Enter the preferred gateway.

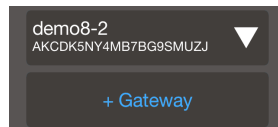

Step 3. Add IP Camera

For Tablet: “+” and “Add IPCam”
For Phone: Setting Icon and “Add IPCam”

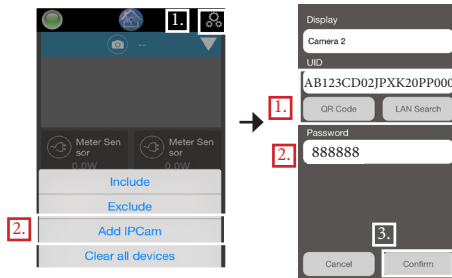

Step 4. Follow **Steps 6-7 on Installation.** (see previous page for illustration)

Step 5. Once successful you can see the video on the top of sensors (phone) or on the upper left side (pad).

7. Frequently Asked:

- How to do reset?
 - Press RESET button camera for 10 seconds. When you hear beeping sound, let go and camera will do reset.
- Where can I set motion recording ?
 - you can do motion recording settings on “P2P IP Camera” APP.
- How many hours can I record in the SD Card?

SD Card Recording Capacity	SD Card Size (Gbytes)				
	4G	8G	16G	32G	
Video Quality	Recording capacity (hours)				
	Max	8.3	17	33	66
	High	11	22	44	88
	Medium	17	34	68	137
	Min	28.4	57	114	227
	Low	28.4	57	114	227