




Think Different. LIVE Different

PAD19 Mini In-Wall Dimmer Module

The smallest wireless dimmer control
 Control 1 dimmer with a physical button
 Interact with other Z-wave devices
 Provide easy repeater function
 With Z-wave 700 S2 smart started

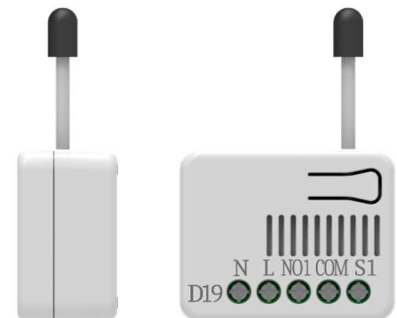

Rated	100-240Vac 50-60Hz 0.7A
Load	160W
RF distance	Min. 40M indoor, 100M outdoor line of sight,
RF Frequency	908.4MHz,916MHz (U.S. A./Mexico) 868.4MH, 869.85MHz (EU) 920.9MHz, 921.7MHz, 923.1MHz (TW/SG/Thai/KR) Transceiver
Chip	Z-wave 700 Series
Support Z-wave	SDK 7.15.01
Dimension	36(L) x 29(W) x16.5X(H) mm
Weight	17g
Location	indoor use; IP20
Operation Temperature	0 - 40°C
Operation Humidity	85%RH max