




CREATE SMART LIVING FOR YOU

PAT15 Flood Water Sensor

- With Small Flood Sensor
- Extremely low power consumption
- Build-In Buzzer
- Easy and quick to install
- Z-wave wireless systems integration
- Interactive with other device



S2

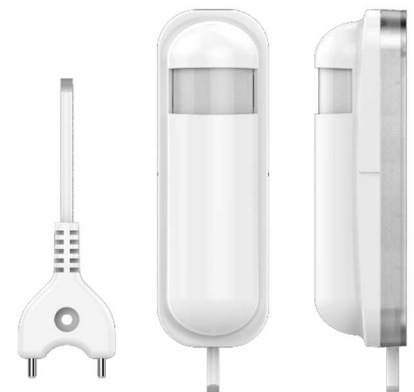

Specification

Rated Voltage	3.0 V by CR123A
RF distance	Min. 40M indoor, 100M outdoor line of sight,
RF Frequency	908.4MHz,916MHz (U.S. A./Mexico) 868.4MHz, 869.85MHz (EU) 920.9MHz, 921.7MHz, 923.1MHz (TW/SG/Thai/KR) Transceiver
Chip	Z-wave 700 Series Module
Battery	CR123A 3V 1700mAh
Battery Life	20 years (Flood Alarm Report:1 times/month, Auto Report: 4 times/ Day, Auto Wake up 1 time/ Day)
Dimension	85(L) x 28(W) x 23(H) mm
Weight	54.6g
Location	Indoor use only
Operation Temperature	-20 to 50°C
Operation Humidity	85%RH max